Product Datasheet

LED Flood-Light Luminaire



Areas of applications

- Clubs, hotels, stages.
- Facades.
- Mosques, museums.
- Outdoor Applications.

Product Features

- **Luminaire efficacy up to 120 lm/w.**
- **Life time 50 K hours.**
- **Class I Protection.**
- **Ingress Protection: IP65.**
- **Failure rate less than 10%.**
- **High Pressure Die Cast Aluminum.**








Technical Data


Manufacturer	Storm Electric (Storm LED)
Input Power	250 W
Input Voltage Range	85–265 Vac
Power Factor	≥ 0.95
Input Current	< 2.941 A
Total Harmonic Distortion (THD)	≤ 10%
Frequency Range	50-60 HZ
Driver	Storm LED Driver
Driver Efficiency	≥ 90 %
Luminaire Efficacy	120 lm/w
LED Type	Manlux
Output Lumen	30000 lm
Color Rendering Index (CRI)	Ra ≥ 80
Color Temperature (CCT)	3000 K – 6500 K
SDCM	1-3 Steps
Beam Angle	120°
Ambient Temperature & Humidity	-5°C to 45°C 20% to 95%
Protection	-Over Voltage Protection-≈Vac 310 -Under Voltage Protection-≈Vac 75 - Over Temp. Protection as dimming in full power @ Tc=80°C -Surge Protection 6 KV
Ingress Protection	IP65
Fixture Weight	5.376 Kg
Order Code	(3000k) FLG-250W-30M-S5-V2 (4000k) FLG-250W-40M-S5-V2 (5000k) FLG-250W-50M-S5-V2 (6500k) FLG-250W-65M-S5-V2

Notes: Luminaire power may be (±10%) of rated power & lumen may be (-10%) of rated lumen according to Standard (IEC 62717)

https://www.stormelectric.org/en

Dimensions

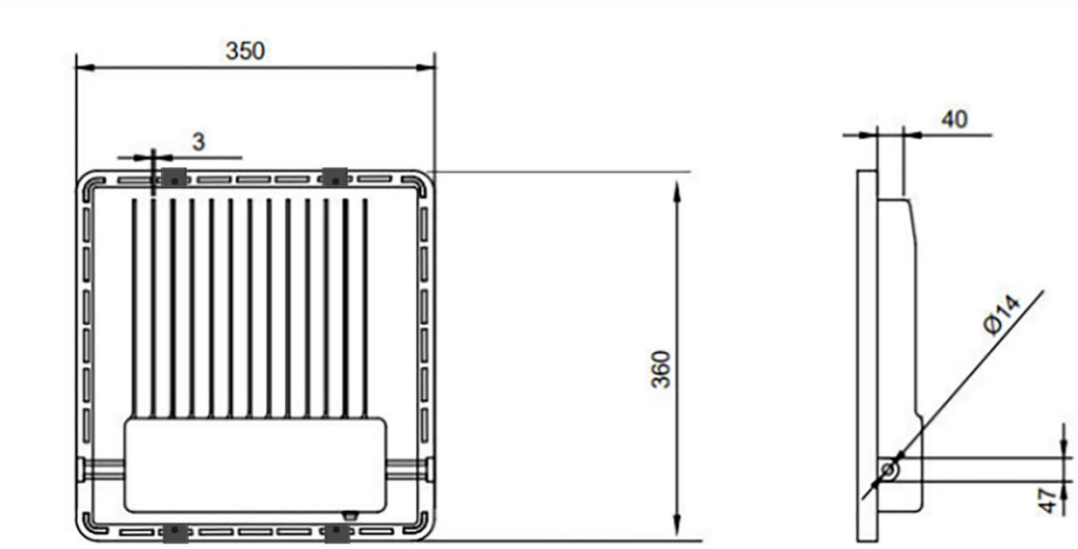

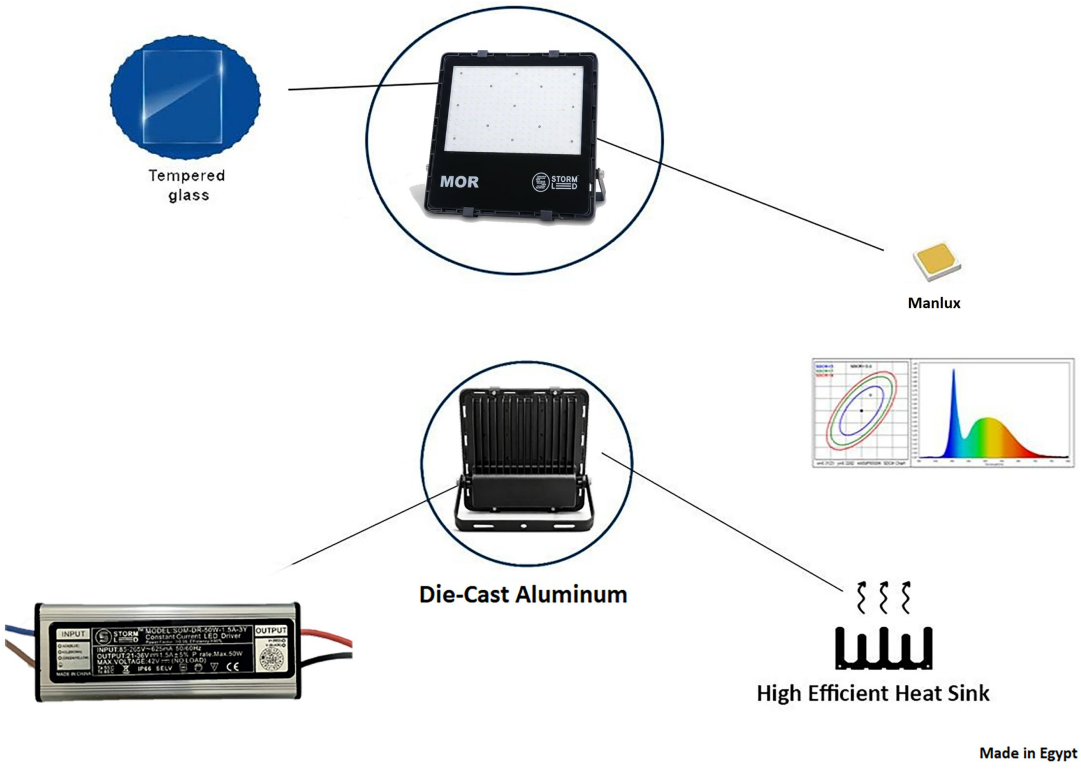

https://www.stormelectric.org/en